



# SPECIFICATION

## CONTACT RATING :

10A, 5A, 3A – 250V AC with 600gms, 400gms, 300gms, 200gms, 100gms, 50gms actuating force with Plunger Color Black, Yellow resp. If not specified, Standard Operating Force will be 300 gmf.

CONTACT RESISTANCE : < 50 mW Initial  
 INSULATION RESISTANCE : >100 MW (at 500 VDC)  
 DIELECTRIC STRENGTH : > 1000 VAC (1 min)  
 OPERATING TEMP : -25 C to +80 C


## MATERIALS & FINISHES

BODY & COVER : PBT 30GF (UL APPROVED)  
 PLUNGER : Acetal / PA  
 CONTACTS : Silver Alloy  
 TERMINALS : Brass (Silver or Tin plated)  
 ROCKER : Brass Silver plated  
 SPRING : Beryllium Copper  
 (If not specified, the COMMON Terminal will be Silver Plated and the NO & NC Terminals will be Tin Plated)

## HOW TO ORDER:

- For standard switches by describing as given below
- For Special switches please consult factory with Samples/Drawings

## SWITCH (WITHOUT MOUNTING BRACKET)

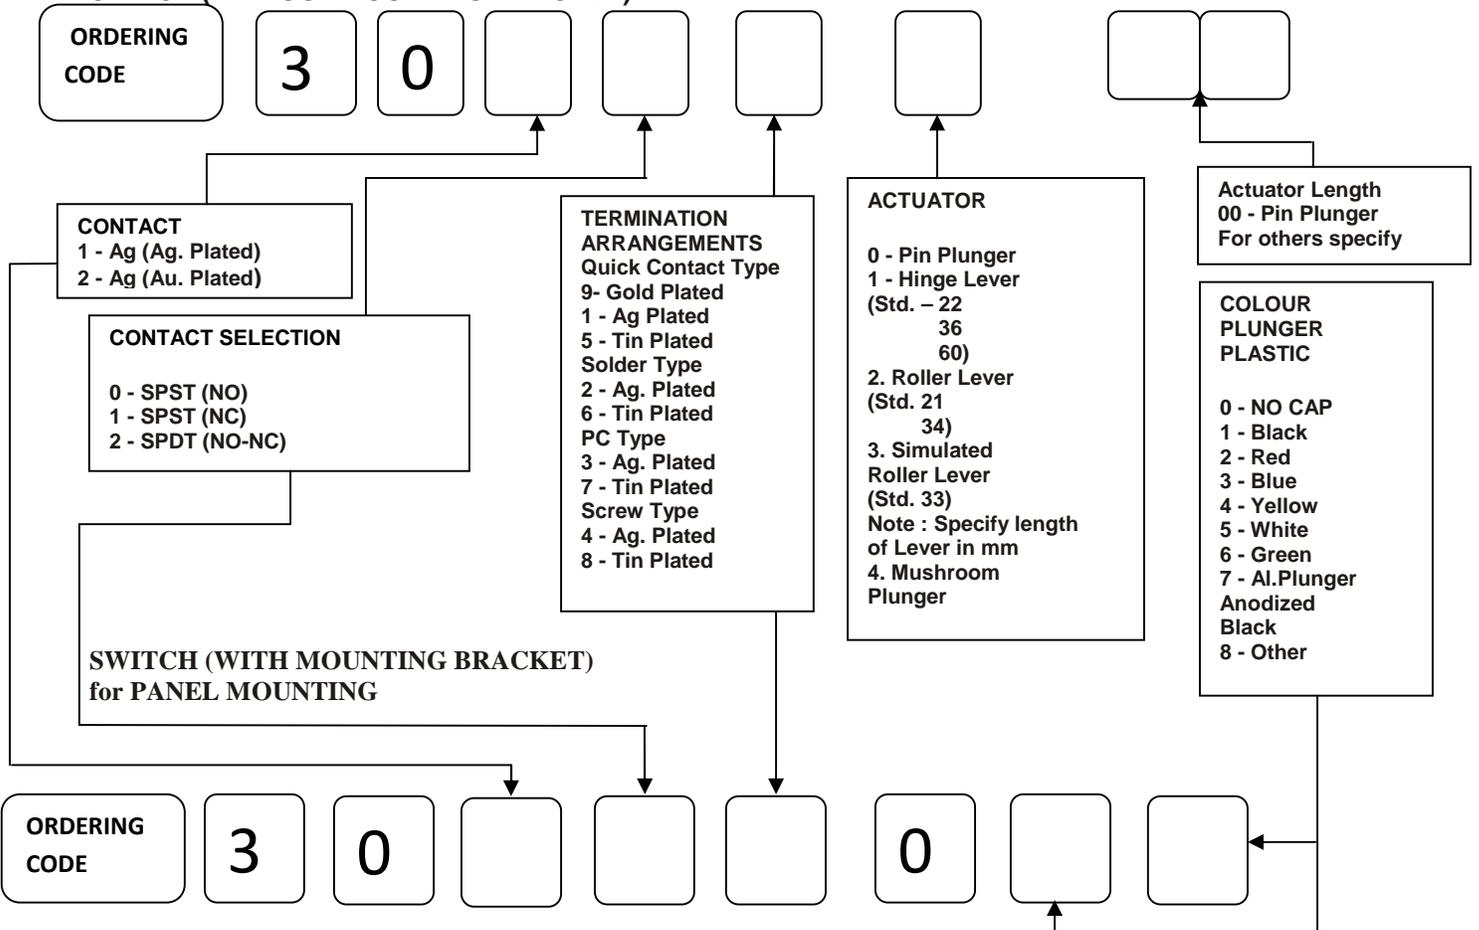

## SWITCH (WITH MOUNTING BRACKET) for PANEL MOUNTING

## MOUNTING

- |                                  |  |                                    |
|----------------------------------|--|------------------------------------|
| 0 - W/O Bracket                  | 3 - Same as 2 with Dome Nut            | 6 - Same as 2 with Metal Dome Nut  |
| 1 - With Bracket M12 x 0.75 bush | 4 - Same as 1 with Plastic Dome Nut    | 7 - Same as 5 with Metal Round Nut |
| 2 - With Bracket M6 x 0.75 bush  | 5 - Same as 1 with Plastic Knurled Nut |                                    |

## SUNSHINE INNOVATIVE ELECTRONICS

# 24, 12th Cross, Magadi Road, Cholurpalya, Bangalore 560023.

Tel: 080 23158335 / 9845568335 / 9008830789

Website: [www.sunshineswitches.com](http://www.sunshineswitches.com). Email: [sales@sunshineswitches.com](mailto:sales@sunshineswitches.com)/ramesscomp@gmail.com.